


# Colonna di guida a un diametro / One diameter lead column



# ECO - 2

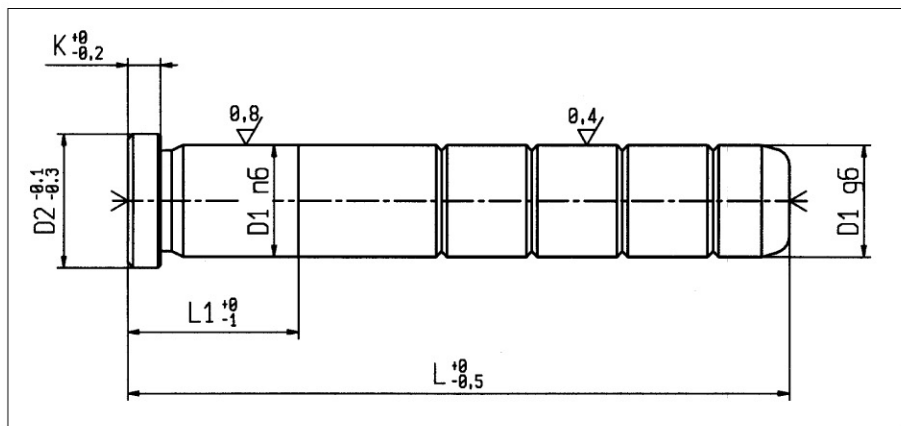

**Acciaio:** UNI 16 Cr Ni 4  
**Steel:** UNI 16 Cr Ni 4

**Durezza:** HRC 60 - 62  
**Hardness:** HRC 60 - 62

**Esecuzione:** Cementato, temperato, rettificato, lappato  
**Execution:** Carburized, hardened, grinded, lapped

D1	12	14	16	18	20	25	32	40	50	60
D2	16	18	20	22	24	30	37	45	55	68
K	5	5	5	5	6	7	7	8	10	12
L	L1									
50	12,5	-	-	-	-					
60	15	-	-	-	-					
70	17,5	-	-	-	-					
80	20	-	-	-	-					
90	22,5	-	-	-	-					
100	25	-	-	-	-					
120	27	-	-	-	-					
	30						-	-		
140	27	-	-	-						
	30				-	-				
	35							-	-	
160	30		-	-	-	-				
	40							-	-	
180	30			-	-	-				
	45							-	-	
200	50			-	-	-				
220	50					-				
240	50					-				
260	55							-	-	
280	55							-	-	
300	60							-	-	
350	70								-	-
400	80								-	-
500	100									-
600	120									-
800	140									-

Esempio di ordinativo: D1 x L

